



INTERNAL AND EXTERNAL ACTIVATION IS SUBJECT TO PROJECT SPECIFICATION. CABLE ROUTES IF REQUIRED ARE TO BE BY OTHERS

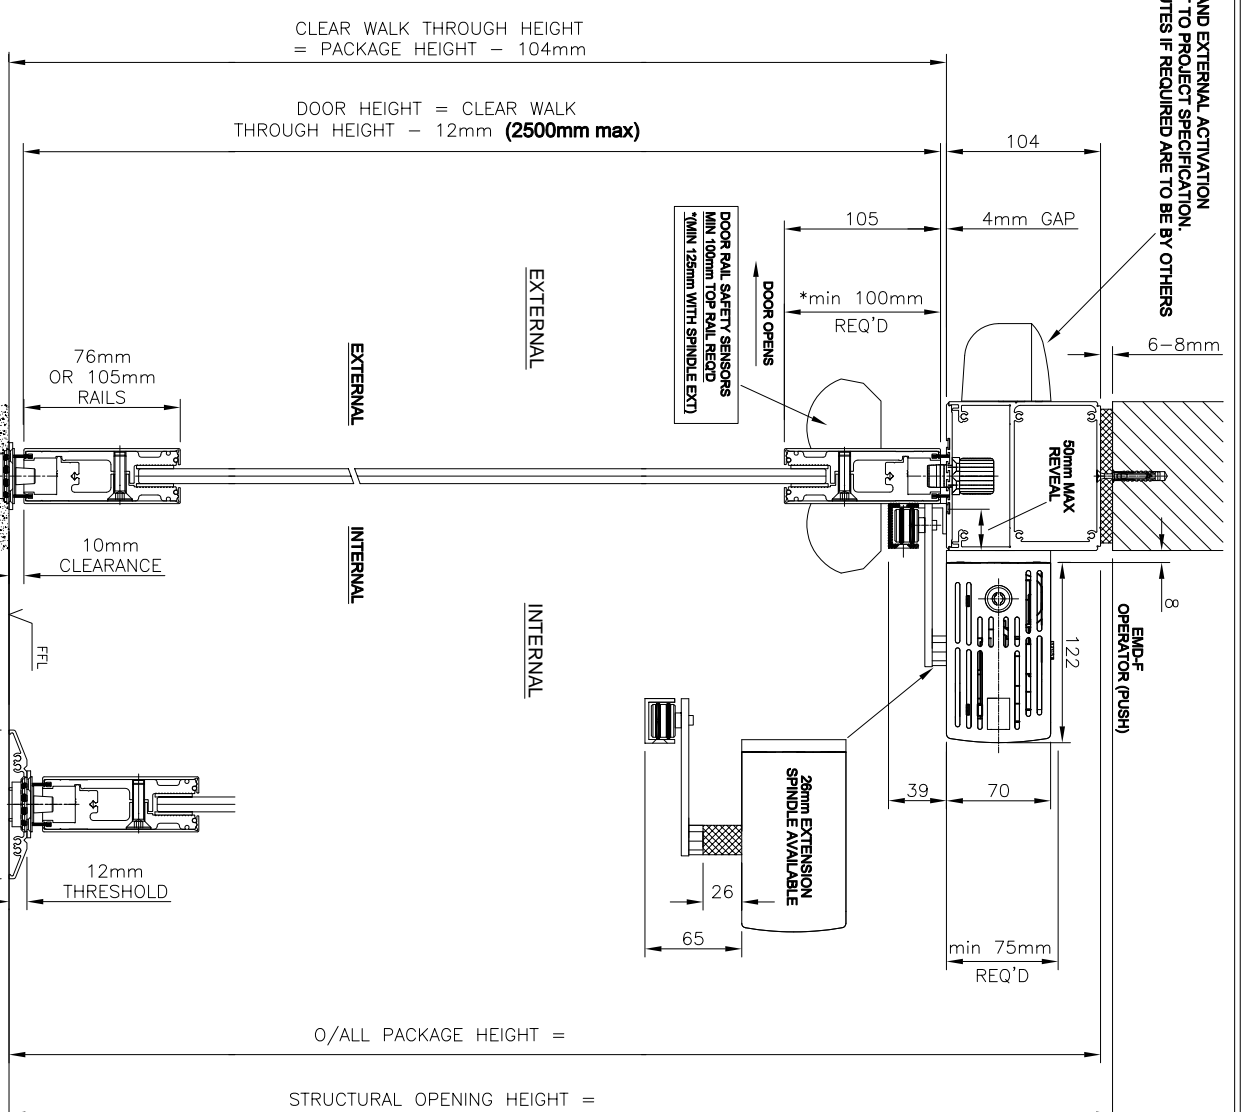

PROJECT SPECIFIC DETAILS

PROJECT :	
FINISH :	
GLASS :	
LOCKING :	
CONTROLS :	
ACTIVATION :	
SAFETY :	

Revision	Drawn	Date	Reason for Change
B	GH	2/6/10	MIN TOP RAIL INCREASED TO 100mm
A	GH	1/3/10	PROFILE AMMENDED ON ELEV




EMD-F TRANSDOM MOUNT PUSH (GUIDE CHANNEL) - Pair with doors in All Glass AP profiles within Aluminium Goalpost Frame

Drawn GH Appd NTS Scale JUL 08

Lichtfeld Staffordshire, WS13 8SY

www.geze.com

- BARRIERS MAY BE REQUIRED
- a) TO SAFEGUARD AGAINST PEDESTRIAN TRAFFIC APPROACHING FROM THE SIDE INTO THE SWEEPED AREA (OPENING AND CLOSING) OF THE SWING DOOR.
 - b) TO DIRECT PEDESTRIAN TRAFFIC TOWARDS THE DOORWAY OPENING
- PLEASE NOTE BARRIERS SHOULD BE POSITIONED IN SUCH A WAY THAT THEY DO NOT CAUSE AN OBSTRUCTION, OR INHIBIT MEANS OF ESCAPE OR REDUCE THE CLEAR OPENING.

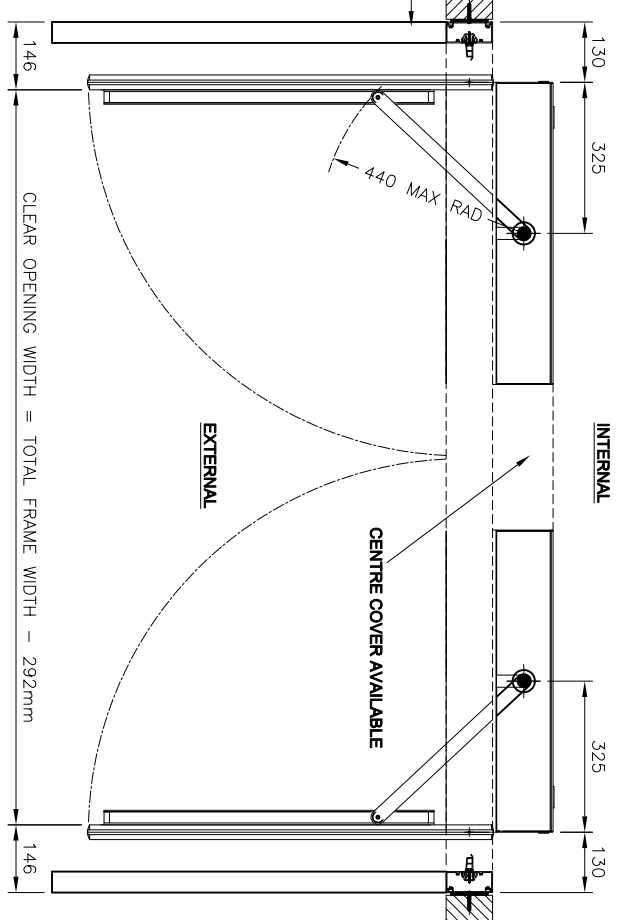

This drawing shows the actual stage of product development at the time indicated. It is not intended to be used for the construction of a building. The drawing remains the property of GEZE and is not to be used without the express consent of GEZE.