

Slimdrive SF SPECIFICATION SHEET

MAXIMUM DOOR WEIGHT

40kg PER DOOR LEAF FOR A BI-PART
& SINGLE OPERATOR

MINIMUM & MAXIMUM OPENING WIDTHS

900mm – 2000mm SUBJECT TO DOOR WEIGHT

MAXIMUM OPENING HEIGHT

2200mm

SF OPERATOR DIMENSIONS

282mm WIDE x 70mm DEEP

SF OPERATOR WEIGHT

13kg PER LINEAR METRE

FITTING TOLERANCE AT HEAD

MINIMUM 20mm FROM TOP OF SF OPERATOR
TO CEILING OF BULKHEAD ABOVE

POWER CONSUMPTION

150 va

FUSED SPUR

A 240 Volt 13A FUSED SWITCHED SPUR WILL BE REQ'D
THIS IS TO BE SUPPLIED AND INSTALLED BY OTHERS
THE LOCATION IS TO BE WITHIN 1 METRE OF
THE OPERATOR, SUBJECT TO SITE CONDITIONS.
CABLE ROUTE BY OTHERS TO THE LH SIDE
OF THE OPERATOR AS VIEWED INTERNALLY
LOOKING AT THE OPERATOR COVER

FIRE ALARM CONNECTION

ONE PAIR OF NORMALLY OPEN VOLT FREE CONTACTS
BY OTHERS, TERMINATING AT THE OPERATOR
IF FIRE ALARM ACTIVATION IS SPECIFIED.


CABLE REQUIREMENTS

PROGRAMME SWITCH : 4 CORE SCREENED
KEY SWITCH : 8 CORE .22
MAINS : 3 CORE FLEX 2.5mm
FIRE ALARM / BMS : FP CABLE

LOCKING

ELECTRO MECHANICAL LOCKING DEVICE ONLY

DETAILS OF GEZE PROGRAMME SWITCH

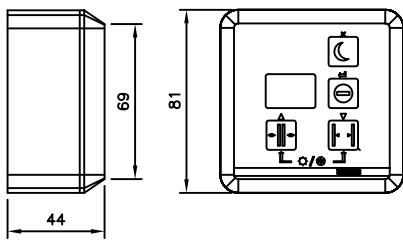

Press once for
automatic



Press once for
night mode



Press once for
one way traffic




Press once for
hold open

Press simultaneously
for winter setting

NOTE – THE PROGRAMME SWITCH IS TO BE LOCATED
SO THAT THE DOORS ARE IN FULL VIEW WHEN
CHANGING THE FUNCTIONS

ALL CABLE ROUTES / CONTAINMENTS FROM THE
PROGRAMME SWITCH TO THE OPERATOR ARE
TO BE BY OTHERS

Revision	Drawn	Date	Reason for Change
Drawing No. SF SPEC SHEET			
Title SF OPERATOR GENERAL SPECIFICATION			
			GEZE UK Ltd Blenheim Way Fradley Park Lichfield Staffordshire.
Drawn GH	Appd	Scale NTS	Date DEC 08
www.geze.com TEL 01543 443000			FAX 01543 443001